

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
26 May 2005 (26.05.2005)

PCT

(10) International Publication Number  
**WO 2005/047699 A1**

(51) International Patent Classification<sup>7</sup>: **F04B 39/02**

(21) International Application Number:  
PCT/JP2004/017134

(22) International Filing Date:  
11 November 2004 (11.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2003-382195 12 November 2003 (12.11.2003) JP

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.**  
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 5718501 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NISHIHARA, Hidetoshi.**

(74) Agent: **HIGASHIMA, Takaharu; HIGASHIMA**  
PATENT OFFICE, Daiko Building, 2-14 Umeda 3-chome,  
Kita-ku, Osaka-shi, Osaka 5300001 (JP).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

[Continued on next page]

(54) Title: COMPRESSOR

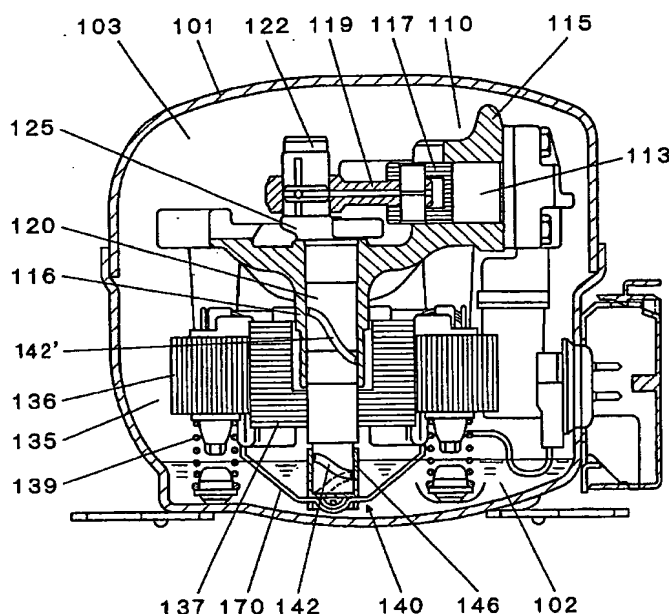

(57) Abstract: An oil pump is provided with helical grooves 142 and 142' carved on the outer periphery of the shaft 125, with an approximately cup-shaped sleeve 146 loosely fit to the outer periphery of the shaft such that the bottom part of the shaft and the bottom plate of the above-mentioned sleeve are engaged in relatively rotatable manner, and with a rotation suppression means for suppressing the rotation of the sleeve. Thereby, even at the low rotation rate operation, oil is raised reliably to compressor unit, offering a highly reliable compressor operation.

WO 2005/047699 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*